



MULCHERS



AHM/240



ASM/200





AMM/155

AMM

Pasture and crop residues are finely chopped and the swath evenly spread over the ground providing a mulch to improve soil moisture retention and seed germination.

Features

- * Clevis hitch cat I three point linkage
- * Chain top link
- * 4mm Body panel to withstand obstacle impact
- * Blades pivoting on hardened bushes and grade 8 bolts
- * Adjustable height skirts
- * Built-in mulching bar
- * Friction clutch optional

AHM

Typical applications:

Wheat, Maize, Sorghum, Rice and Cotton stubble.

Tobacco

Potato haulms

Pineapple tops


Pasture topping

Prunings ~ Macadamia and Grape

Banana plant prunings

Features

- * Double skin steel body panels to withstand obstacle impact
 - * Clevis hitch cat 1 and 2 three point linkage
 - * 4 x SPBX Section belt rotor drive on large diameter pulleys for optimum blade tip speed
 - * Series 8 drive shaft with friction clutch
 - * Floating top link
-
- * 220mm (9") diameter rotor tube with 6 row blade configuration to reduce power requirements and even out belt loadings.
 - * Blades pivoting on hardened bushes and grade 8 bolts.
 - * 55mm diameter taper lock rotor support bearings.
 - * Fully adjustable rear flap to control swath spread.
 - * Adjustable height skirts.

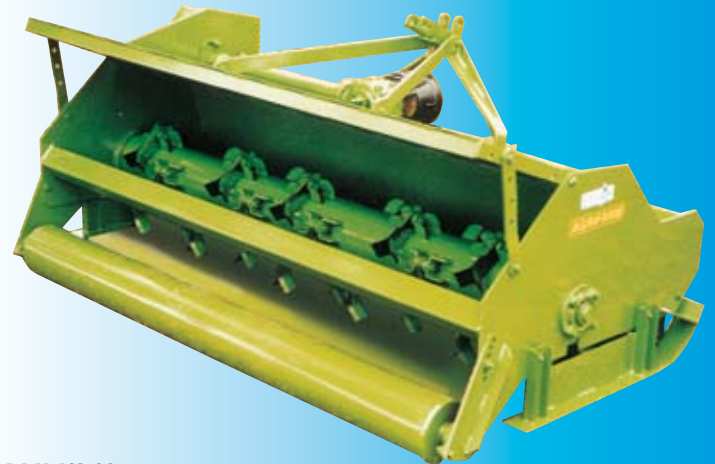

AHM/240



AHM/285

ACM

Built for large area crop residue mulching such as cotton, maize, rice, wheat and potato haulms

Features

- * Dual rotors
- * 6 x spbx section belt drive on both sides
- * 260 hp gearbox
- * Adjustable height wheel front or rear mounted
- * 9 series drive shaft with friction clutch
- * Cotton kit option
- * Trailing kit option



ACM/400



ASM/200

ASM

Universal low clearance mulcher suitable for roadside grass maintenance, orchard and vineyard prunings

Features

- * Can be front or rear mounted on the tractor.
- * Hydraulic side shift standard.
- * Can be built LH or RH offset.
- * 6 series drive shaft with friction clutch standard.



ASM/200

- * Roller or castor wheels standard.
- * 4 x SPBX section belt rotor drive on large dia pulleys for optimum blade tip speed.
- * Hammers fitted standard, 'Y' flail option.
- * 4mm thick plate monocoque body construction.
- * Chain top link option.

Mulcher Specifications

Model	Cutting Widths cm Ins	Min Requirement kW hp	No. Blades	Cutting Height cm	Weight kg	Transport Width	Options									
							Swath Deflectors	Friction Clutch	Rear Roller	Castor Wheels	Mulching Bar	1000 PTO Kit	Hammers	Flat Blade	Straight Blade	Y Blade
ANM/155	155 61	23 30	32	2 - 10	490	177	O	O	O	N	S	N	O	O	S	
ANM/195	195 77	30 40	40	2 - 10	575	232	O	S	O	N	S	N	O	O	S	
AHM/160	160 63	37 50	36	2 - 10	710	187	O	S	O	O	O	N	O	O	S	
AHM/195	195 77	44 60	48	2 - 10	815	222	O	S	O	O	O	N	O	O	S	
AHM/240	240 94	51 60	60	2 - 10	925	267	O	S	O	O	O	N	O	O	S	
AHM/285	285 112	60 80	72	2 - 10	1100	318	O	S	O	S	O	N	O	O	S	
ASM/200*	200 79	37 50	18	2 - 10	760	232	N	S	S	O	SX2	S	N	N	O	
ASM/265*	265 104	48 65	24	2 - 10	920	297	N	S	S	O	SX2	S	N	N	O	
*ASM Models Fitted With Hydraulic Side Shift																
AOM/200	200 79	37 50	18	2 - 10	760	232	N	S	S	O	SX2	S	N	N	O	
AOM/265	265 104	48 65	24	2 - 10	920	297	N	S	S	O	SX2	S	N	N	O	
AHM/160F▲	160 63	51 70	18	2 - 10	980	187	N	S	S	N	N	S	N	N	O	
AHM//195F▲	195 77	60 80	24	2 - 10	1100	222	N	S	S	N	N	S	N	N	O	
AHM//240F▲	240 94	67 90	30	2 - 10	1250	272	N	S	S	N	N	S	N	N	O	
▲Forestry Models Fitted With Heavy Duty Rotor & Additional Body Panels																
ACM/400	400 157	110 150	96	2 - 20	1800	450	N	S	N	F	N	S	O	O	S	
							Not STD Stock Items									

N = Not available

S = Standard

O = Option

F = Fixed

Your Dealer



Manufactured by:
AGRIFARM ENGINEERING PTY. LTD.
 Arkwright Crescent
 Taree NSW 2430
 TELEPHONE (02) 6552 6888 ~ FAX (02) 6551 0307
 Email: sales@agrifarm.com.au
 Web site: www.agrifarm.com.au
 Agrifarm Engineering's policy is to continually review machine designs to improve performance. We therefore reserve the right to vary the specifications to those shown on this brochure.

ABN 36 115 205 331